


# Data sheet



Time / Immersion & General Purpose Time Switches

NTT04 – 24 Hour/7 Day General Purpose Timeswitch

## Product Image & Line Diagram

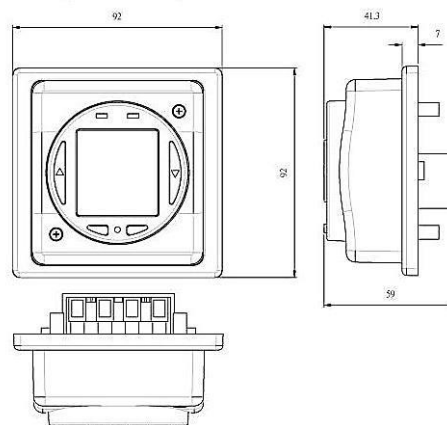

## Technical Data

| General                   |                                                                                                      |
|---------------------------|------------------------------------------------------------------------------------------------------|
| Operating Voltage         | 230V AC                                                                                              |
| Frequency                 | 50Hz                                                                                                 |
| Installation Type         | Surface or recessed                                                                                  |
| Min Depth of Wall Box     | 32mm, Single gang back box or pattress                                                               |
| Contact Type              | Normally open                                                                                        |
| Class Protection          | Class 2                                                                                              |
| Program                   | 7 Day weekly program (4 ON/OFF per day, 28 ON/OFF per week)                                          |
| Number of Channels        | 1                                                                                                    |
| Power Reserve             | Yes, 720 Hours (Non-replaceable rechargeable battery)                                                |
| Switch Rating             | 16A Resistive, 4A Inductive. 1 HP. 750W Incandescent/<br>Halogen/Fluorescent, 100W LED/CFL lighting. |
| LED Indicators            | Power, Output                                                                                        |
| Boost Function            | Yes, 1 Hour or 2 Hour                                                                                |
| Advance Function          | Yes, Permanent or until next programmed operation                                                    |
| Operating Temperature     | 0°C to 40°C                                                                                          |
| Accessories (Included)    | Instructions, Fittings                                                                               |
| Accessories (Optional)    | None                                                                                                 |
| Dimensions                | Height 92mm, Width 92mm, Depth 59mm                                                                  |
| Construction              | Casing: Polycarbonate                                                                                |
| Weight                    | 168g                                                                                                 |
| EAN                       | 5012483012321                                                                                        |
| Designed In Accordance To | BS EN 60730-2-7<br>Includes updates and amendments.                                                  |
| Guarantee Period          | 3 Years                                                                                              |



A theben Group Company

Article Number: NTT04 DS230715V1

