



TITLE:

OSP Overall Foil Screened Pairs LSZH

CODE:


SFX/OSP10-LSZH-D-GRY-1000

DESCRIPTION:

1000m OSP10 10pr 24AWG Overall Foil
Screen 600V Grey LSZH (9510)

SUPPLIED AS:

Reel of 1000m

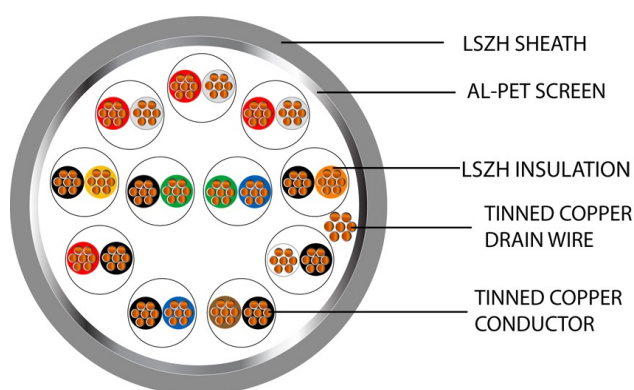



Product Specification

Cable Construction

Cable Construction	10 Pairs
CPR	Dca -s:2 -a:1 -d:2
Conductor	Tinned Copper
Conductor Diameter (mm)	0.19 ±0.008 x 8(0.20mm ²)
Overall Diameter (mm)	9.40 ±0.20

Insulation

Insulation	LSZH
Insulation Colour	3 pairs of Red with White, Green, Blue; 7 pairs of Black with Red, White, Green, Blue, Yellow, Brown, Orange
Insulation Resistance @20°C	>200MO/km
Insulation Thickness (mm)	0.28

Outer/Jacket Specification

Jacket	LSZH
Overall Colour	Grey
Overall Diameter (mm)	9.40 ±0.20
Jacket Colour	Grey RAL 7042
Jacket Thickness (mm)	0.70

Electrical Characteristics

Insulation Resistance @20°C	>200MO/km
Max Conductor DC resistance @ 20°C	<79.00O/km
Rated Temperature (°C)	-40°C to 70°C
Rated Voltage (V)	600V





**BELDEN
EQUIVALENTS**

Securi-Flex®

MORE INFORMATION:

Sorry, no more information is available for this product

Belden equivalents



enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23

TERMS AND CONDITIONS APPLY - WHILE EVERY EFFORT HAS BEEN MADE TO ENSURE THE ACCURACY AND COMPLETENESS OF THE INFORMATION, NO GUARANTEE IS GIVEN NOR RESPONSIBILITY TAKEN FOR ERRORS OR OMISSIONS IN THIS DATA SHEET.

FLAME-FLEX®

Drum-R®

LUCKINS®

epim
putting data first

EDA ELECTRICAL
DISTRIBUTORS'
ASSOCIATION

BSI
BSI
BSI

KNX
KNX

cdi
cdi

CPR
CPR

UK
CA