

**TITLE:**

Alarm Type 1 Copper LSZH

CODE:

SFX/8C-TY1-SCR-LSZH-D-WHT-100



DESCRIPTION:

100m 8 Core Type 1 Alarm Screened White LSZH

SUPPLIED AS:

Reel of 100m

- Generally used for connecting alarm equipment such as sensors, control panels and other low voltage circuits
- This cable is ROHS compliant
- Low smoke zero halogen plastic is good for use inside public buildings and spaces as will not emit toxic gases if the cable catches fire
- A premium alarm cable conforming to BS4737
- Improved performance and protection against fire

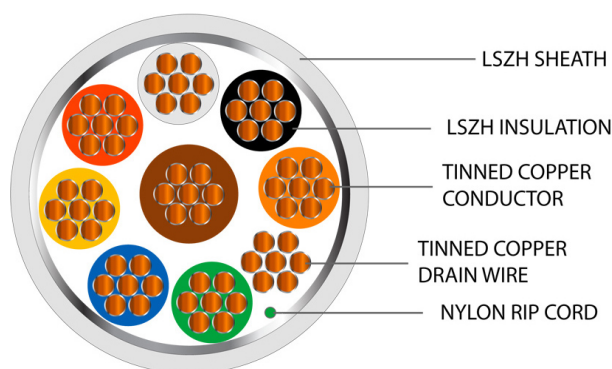



Product Specification

Cable Construction

Cable Construction	8 Cores
CPR	Dca -s1 -a1 -d1
Conductor	Tinned Copper
Conductor Diameter (mm)	0.19 ±0.008 x 7
Stranded Diameter (mm)	0.22
Overall Diameter (mm)	4.60 ±0.200
Compliance and Standards	BS4737-3.30:2015,RoHS2 2011/65/EU

Insulation

Insulation	LSZH
Insulation Colour	Red,Black,Blue,Yellow,Green,White,Orange,Brown
Insulation Resistance @20°C	>200 MO/km
Insulation Thickness (mm)	0.21

Outer/Jacket Specification

Outer Jacket	LSZH
Outer Jacket Colour	White RAL 9003
Inner Jacket	LSZH
Jacket	LSZH
Overall Colour	White
Overall Diameter (mm)	4.60 ±0.200
Jacket Colour	White RAL 9003
Jacket Thickness (mm)	0.5
Nylon Rip-Cord	Green 210D

Electrical Characteristics

Insulation Resistance @20°C	>200 MO/km
Max Conductor DC resistance @ 20°C	100O/km
Rated Temperature (°C)	-40°C to 70°C
Rated Voltage (V)	30V





ALARM CABLE



MORE INFORMATION:

Sorry, no more information is available for this product

Alarm cable



enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23

TERMS AND CONDITIONS APPLY - WHILE EVERY EFFORT HAS BEEN MADE TO ENSURE THE ACCURACY AND COMPLETENESS OF THE INFORMATION, NO GUARANTEE IS GIVEN NOR RESPONSIBILITY TAKEN FOR ERRORS OR OMISSIONS IN THIS DATA SHEET.

