

**TITLE:**

Cat5e 4pr UTP

CODE:

SFX/C5-UTP-LSZH-D-RED-305



DESCRIPTION:

305m Category 5e, 4pr UTP Red LSZH

SUPPLIED AS:

Reel of 305m

- Capable of 100mbps transfer speed or 100mhz frequency at a maximum distance of 90 meters
- Unscreened cables are thinner, more flexible and less expensive so are suited to building LANS and telecoms applications
- Low smoke zero halogen plastic is good for use inside public buildings and spaces as will not emit toxic gases if the cable catches fire
- Comes in a variety of colours
- Improved performance and protection against fire
- N/A
- Solid core is the most cost effective and commonly used type of cat5e cable

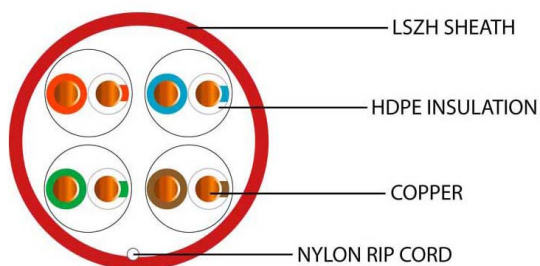

enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23



Product Specification

Cable Construction

CPR	Dca -s2 -a1 -d2
Conductor	Bare Copper
Conductor 2	N/A
Conductor Diameter (mm)	0.47 ±0.01
Overall Diameter (mm)	4.80 ±0.03

Insulation

Insulation	HDPE
Insulation Colour	Blue/White/Blue;Orange/White/Orange;Green/White/Green;Brown/White/Brown
Insulation Thickness (mm)	0.18
Insulation 2 Thickness (mm)	N/A
Outer Insulation	N/A
Outer Insulation Diameter (mm)	N/A
Outer Insulation Thickness (mm)	N/A

Outer/Jacket Specification

Outer Insulation	N/A
Outer Jacket	LSZH
Outer Jacket Colour	Red
Inner Jacket	N/A
Inner Jacket Colour	N/A
Inner Jacket Diameter (mm)	N/A
Inner Jacket Thickness (mm)	N/A
Jacket	LSZH
Overall Colour	Red
Overall Diameter (mm)	4.80 ±0.03
Jacket Colour	Red RAL 3000
Jacket Thickness (mm)	0.49 ±0.03
Nylon Rip-Cord	White 210D

Electrical Characteristics

Max Conductor DC resistance @ 20°C	<1150/km
Rated Temperature (°C)	-40°C to 70°C





NETWORK CABLE



MORE INFORMATION:

Sorry, no more information is available for this product

Network cable



enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23

TERMS AND CONDITIONS APPLY - WHILE EVERY EFFORT HAS BEEN MADE TO ENSURE THE ACCURACY AND COMPLETENESS OF THE INFORMATION, NO GUARANTEE IS GIVEN NOR RESPONSIBILITY TAKEN FOR ERRORS OR OMISSIONS IN THIS DATA SHEET.

