



TITLE:

Cat5e 4pr UTP

CODE:

SFX/C5-UTP-LSZH-D-WHT-305


DESCRIPTION:

305m Category 5e, 4pr UTP White LSZH
HDBaseT Certified

SUPPLIED AS:

Reel of 305m

- Capable of 100mbps transfer speed or 100mhz frequency at a maximum distance of 90 meters
- Unscreened cables are thinner, more flexible and less expensive so are suited to building LANS and telecoms applications
- Low smoke zero halogen plastic is good for use inside public buildings and spaces as will not emit toxic gases if the cable catches fire
- Comes in a variety of colours
- Improved performance and protection against fire
- N/A
- Solid core is the most cost effective and commonly used type of cat5e cable

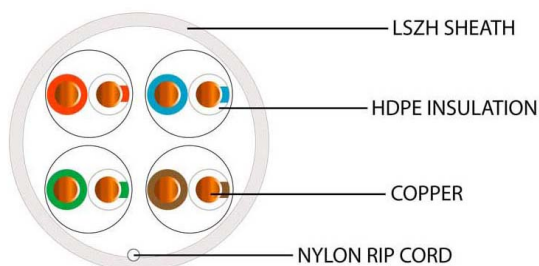

enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23



Product Specification

Cable Construction

CPR	Dca -s2 -a1 -d2
Conductor	Bare Copper
Conductor 2	N/A
Conductor Diameter (mm)	0.47 ±0.01
Overall Diameter (mm)	4.80 ±0.03

Insulation

Insulation	HDPE
Insulation Colour	Blue/White/Blue;Orange/White/Orange;Green/White/Green;Brown/White/Brown
Insulation Thickness (mm)	0.18
Insulation 2 Thickness (mm)	N/A
Outer Insulation	N/A
Outer Insulation Diameter (mm)	N/A
Outer Insulation Thickness (mm)	N/A

Outer/Jacket Specification

Outer Insulation	N/A
Outer Jacket	LSZH
Outer Jacket Colour	White
Inner Jacket	N/A
Inner Jacket Colour	N/A
Inner Jacket Diameter (mm)	N/A
Inner Jacket Thickness (mm)	N/A
Jacket	LSZH
Overall Colour	White
Overall Diameter (mm)	4.80 ±0.03
Jacket Colour	White RAL 9003
Jacket Thickness (mm)	0.49 ±0.03
Nylon Rip-Cord	White 210D

Electrical Characteristics

Max Conductor DC resistance @ 20°C	<1150/km
Rated Temperature (°C)	-40°C to 70°C





NETWORK CABLE



MORE INFORMATION:

Sorry, no more information is available for this product

Network cable



enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23

TERMS AND CONDITIONS APPLY - WHILE EVERY EFFORT HAS BEEN MADE TO ENSURE THE ACCURACY AND COMPLETENESS OF THE INFORMATION, NO GUARANTEE IS GIVEN NOR RESPONSIBILITY TAKEN FOR ERRORS OR OMISSIONS IN THIS DATA SHEET.

FLAME-FLEX

Drum-Roll

LUCKINS

epim

ELECTRICAL DISTRIBUTORS' ASSOCIATION

KNX

KNX

CDI

CPR

UK CA