

**TITLE:**

Speaker 2 Core PVC (Tracer)

CODE:

SFX/SPK-79-PVC-WHT-100


DESCRIPTION:

100m Speaker Cable 2 Core 79x0.2mm
(2.5mm) White PVC

SUPPLIED AS:

Reel of 100m

- A budget grade speaker cable
- Used for fixed installs and connecting sound systems to speakers
- Polyvinyl chloride plastic has excellent aging properties and will usually exceed a 25-30 year service life
- White pvc sheath with black stripe on cores for identification
- Improved performance and protection against fire
- For low grade, temporary or small domestic installations.

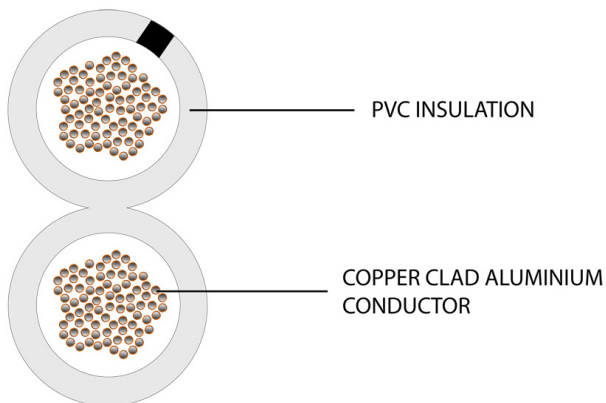



Product Specification

25-YEAR WARRANTY



Cable Construction

Cable Construction	2 cables in shotgun configuration
CPR	Eca
Conductor	Copper Clad Aluminium
Conductor Diameter (mm)	0.20 ±0.008 x 79(2.50mm ²)
Overall Diameter (mm)	7.36 ±0.10 x 3.40 ±0.10

Insulation

Insulation	PVC
Insulation Colour	White RAL 9003 (1 Core marked with Black stripe)
Insulation Resistance @20°C	>200MO/km
Insulation Thickness (mm)	0.72

Outer/Jacket Specification

Jacket	PVC
Overall Colour	White
Overall Diameter (mm)	7.36 ±0.10 x 3.40 ±0.10
Jacket Colour	White RAL 9003
Jacket Thickness (mm)	0.72

Electrical Characteristics

Insulation Resistance @20°C	>200MO/km
Max Conductor DC resistance @ 20°C	<15.3O/km
Rated Temperature (°C)	-20°C to 80°C
Rated Voltage (V)	36V





SPEAKER CABLE




Speaker cable

MORE INFORMATION:

EURO CLASS (ca:cable)		CLASSIFICATION CRITERIA		CPR GUIDE		Securi-Flex®	
FIRE RATING				SFX COMMENT			
Reaction to Fire BS EN ISO 1716				SUBCLASSIFICATIONS FOR EUROCLASSES B _{ca} to D _{ca}			
A _{ca}		Does not contribute to the fire		Due to availability, it will be almost impossible for a cable to meet A _{ca} , so they should only be specified with extreme caution.			
Reaction to Fire BS EN 50399				BS EN 50399/BS EN 61034-2		BS EN 50399	
B1 _{ca}		Minimum contribution to the fire		It's highly unlikely the commonly-used cables will be classified to Class B1 _{ca} .			
B2 _{ca}		Combustible, low flame spread & heat release contribution to the fire		Similar to Class C _{ca} , although a lower acceptable heat release rate and burn measurement. In practice, this is likely to be the highest class cables will meet.			
C _{ca}		Combustible, moderate flame spread & heat release		This is a more rigorous test than Class D _{ca} , this is widely accepted across Europe as the 'go to' classification, but be aware, many cables do not meet Class C _{ca} though availability is improving.			
D _{ca}		Combustible, moderate flame spread & heat release		This classification has relatively little use or acceptance within specifying/contracting organisations. This is because no large scale fire growth is measured.			
Reaction to Fire BS EN 60332-1-2				BS EN 50399/BS EN 61034-2		BS EN 50399	
E _{ca}		Combustible, limited fire spread of less than 425mm		A basic test for vertical flame propagation for a single insulated wire or cable using a 1 KW pre-mixed flame. Note: This test does not measure heat release, toxic fumes or smoke.			
F _{ca}		Combustible, fire spread of more than 425mm		Cables classified to Class F _{ca} may have high levels of flammability due to the materials they are made of. This does not mean that the cable cannot be used, it is more likely to be used external.			
				Classes A to E have to be tested by an independent authorised laboratory. Most cables will fall into classes B2 _{ca} to E _{ca} . For a cable to meet A _{ca} , B1 _{ca} , B2 _{ca} or C _{ca} , there also needs to be regular on-going factory audits.			

OUR OPERATING TEMPERATURE RANGE GUIDE

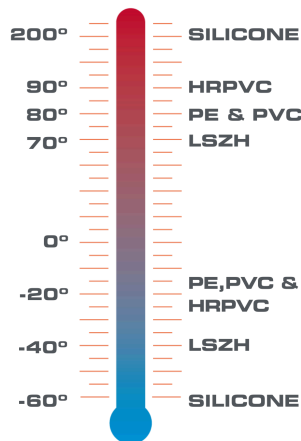

Securi-Flex

enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23