

**TITLE:**

Defence 16-2 Unscreened LSZH

CODE:

SFX/DS-16-2-8A-LSZH-D-BLK-1



DESCRIPTION:

1m (per metre) Def Standard 16 x 0.2mm
8 Core Unscreened Black UV LSZH

SUPPLIED AS:

Per 1m Lengths

- Originally designed for military use, these cables are now widely used in many other industries and applications
- A robust, compact cable with high working voltage range
- Low smoke zero halogen plastic is good for use inside public buildings and spaces as will not emit toxic gases if the cable catches fire
- These cables should not be used for mains connections
- Improved performance and protection against fire
- Uses include security, telemetry, data processing, process control, instrumentation, control equipment and aviation

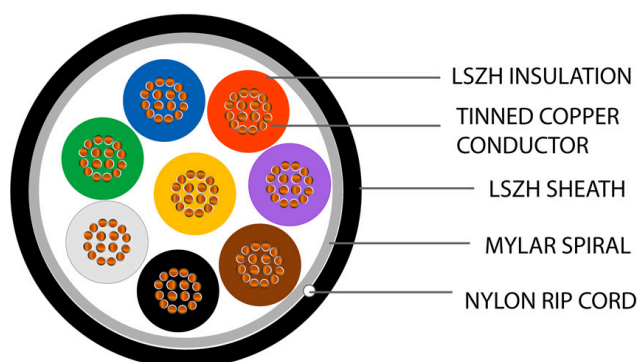



Product Specification

Cable Construction

Cable Construction	8 Cores
CPR	Dca -s:2 -a:1 -d:2
Conductor	Tinned Copper
Conductor Diameter (mm)	0.19 ±0.008 x 16(0.52mm ²)
Overall Diameter (mm)	7.40 ±0.20

Insulation

Insulation	LSZH
Insulation Colour	Red,Blue,Green, Yellow,White,Black,Brown,Violet
Insulation Thickness (mm)	0.3

Outer/Jacket Specification

Jacket	UV LSZH
Overall Colour	Black
Overall Diameter (mm)	7.40 ±0.20
Jacket Colour	Black RAL 9005
Jacket Thickness (mm)	0.7
Nylon Rip-Cord	210D

Electrical Characteristics

Max Conductor DC resistance @ 20°C	<390/km
Rated Temperature (°C)	-40°C to 70°C
Rated Voltage (V)	600V





**DEFENCE
STANDARD CABLE**

Securi-Flex®

MORE INFORMATION:

Sorry, no more information is available for this product

Defence standard cable



enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23

TERMS AND CONDITIONS APPLY - WHILE EVERY EFFORT HAS BEEN MADE TO ENSURE THE ACCURACY AND COMPLETENESS OF THE INFORMATION, NO GUARANTEE IS GIVEN NOR RESPONSIBILITY TAKEN FOR ERRORS OR OMISSIONS IN THIS DATA SHEET.

FLAME-FLEX

Drum-Roll

LUCKINS

epim
putting data first

EDS ELECTRICAL
DISTRIBUTORS'
ASSOCIATION

BSI
BSI
CERTIFIED

KNX
MEMBER

cdi
Cable Data Institute

CPR
Cable Protection
Rating

**UK
CA**