



TITLE:

FR120 Fire Enhanced Flame-Flex

CODE:

SFX/FC-3C-1.5-FR120-ENH-RED-1


DESCRIPTION:

1m (per metre) FR120 3 Core 1.5mm
300/500V Red Enhanced FLAME-FLEX
120

SUPPLIED AS:

Per 1m Lengths

- Can be used both internally and externally in environments where suitable protection is present
- Polymer tape comes away from the sheath when stripping cable
- Low smoke zero halogen plastic is good for use inside public buildings and spaces as will not emit toxic gases if the cable catches fire
- High resistance to kinks to protect cables performance
- Suitable for installations where a circuit must be maintained for up to 120 minutes in the event of a fire
- Can be cut to any length required up to 500m to reduce installation times

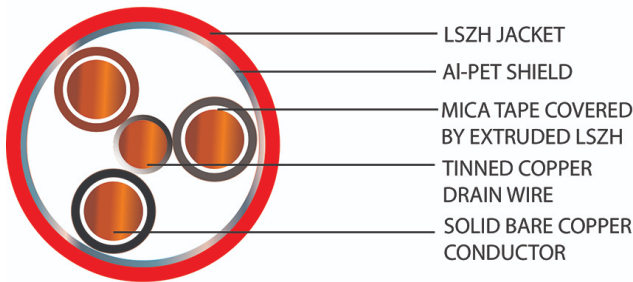

enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23



Product Specification

25-YEAR WARRANTY

Cable Construction

Cable Construction	3 Cores
CPR	LPCB/BASEC
Conductor	Solid Bare Copper
Overall Diameter (mm)	9.20 ±0.01

Insulation

Insulation	Mica tape covered by extruded LSZH
Insulation Colour	Brown, Black Grey
Insulation Thickness (mm)	0.70 ±0.02

Outer/Jacket Specification

Jacket	UV LSZH
Overall Colour	Red
Overall Diameter (mm)	9.20 ±0.01
Jacket Colour	Red RAL 3000
Jacket Thickness (mm)	0.70 ±0.01

Electrical Characteristics

Rated Temperature (°C)	-30° to +70°
Rated Voltage (V)	300/500V

**enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23**



FIRE CABLE



MORE INFORMATION:

Sorry, no more information is available for this product

Fire cable



enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23

TERMS AND CONDITIONS APPLY - WHILE EVERY EFFORT HAS BEEN MADE TO ENSURE THE ACCURACY AND COMPLETENESS OF THE INFORMATION, NO GUARANTEE IS GIVEN NOR RESPONSIBILITY TAKEN FOR ERRORS OR OMISSIONS IN THIS DATA SHEET.

FLAME-FLEX

Drum-Roll

LUCKINS

epim

ELECTRICAL
DISTRIBUTORS'
ASSOCIATION

KNX
MEMBER

KNX
MEMBER

CDI
MEMBER

CPR
MEMBER

UK
CA